


# TippeBolster Pillow

Designed by:  
Georgina Lewis and Jan Dannenmann

A BOLSTER PILLOW IS A  
WONDERFUL ACCENT  
ON ANY BED!

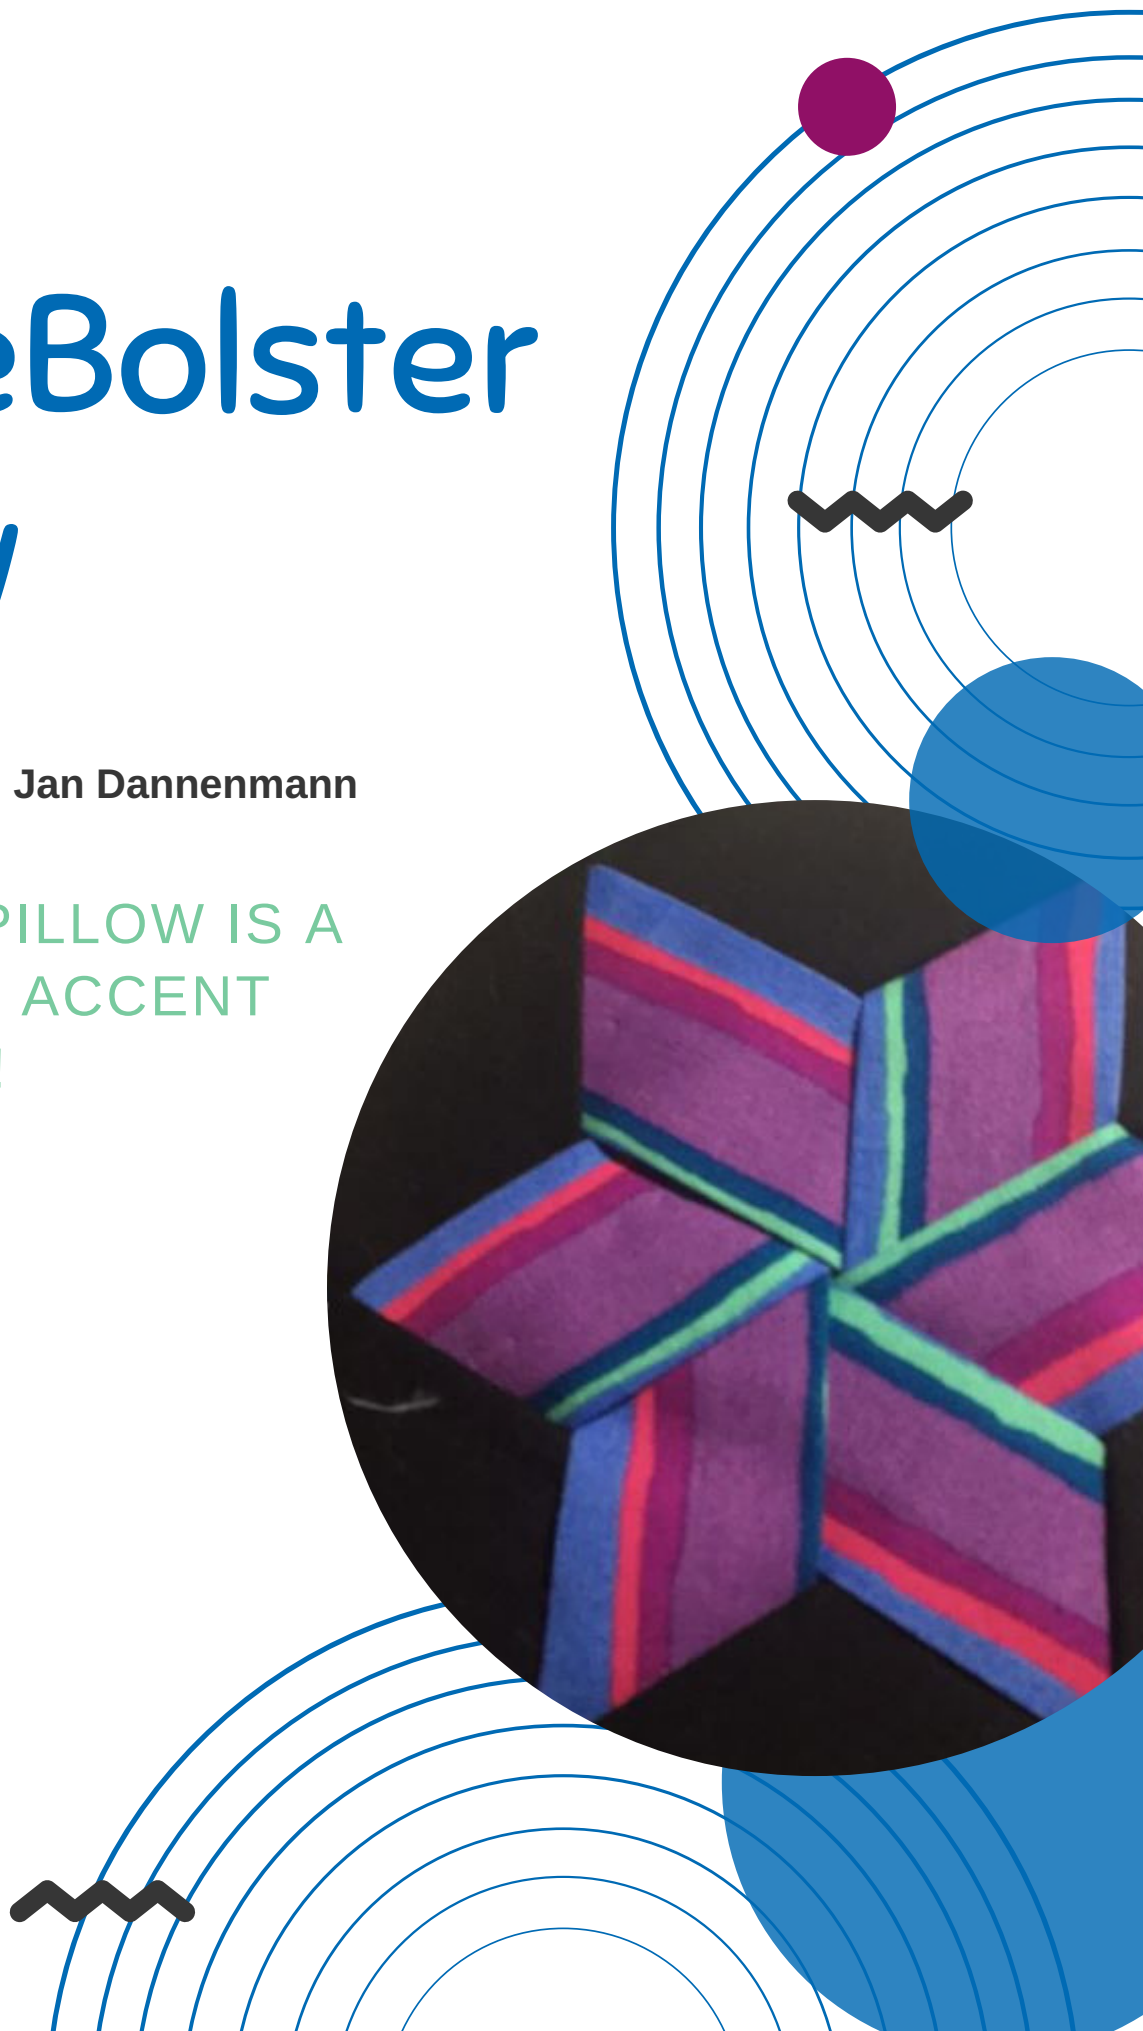

# MATERIALS NEEDED

- 2 YDS Kaffe Fassett Collective Regimental Stripe Blue
- 1 YD Designer Fabric Black
- ¼ YD Lilac Fabric
- ¼ YD Shape Flex Interface (optional - for securing threads on strips)
- 17" X 25" Medium weight Shape Flex or Head N Bond
- Form Board
- Long Straight pins
- 30" ByAnnie Black Zipper
- For star effect you will need a weaving tool like the Wefty and the Wefty Star pattern (if making the star shape in your pillow)

## PREP STEPS



### Cutting your fabrics:

Cut Regimental Fabric in the direction of the stripe.

30 - 2" x WOF

Cut Designer Fabric Black


15 - 2" x WOF

Cut Lilac Fabric

2 - 1" x 24"

2 - 3 ½" circles

Cut the light weight shape flex into 45 - ¼" strips (optional)

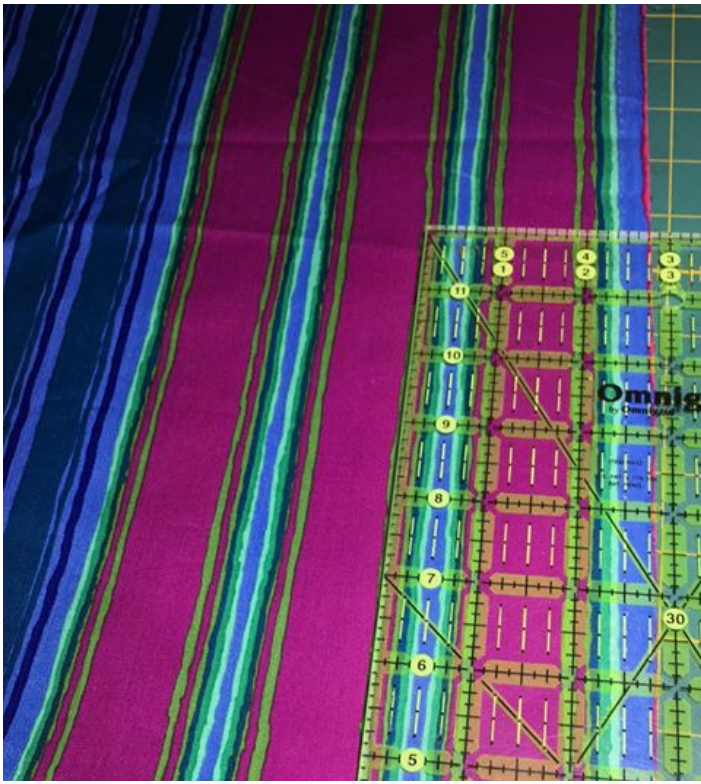

# GETTING READY TO WEAVE

1

## REINFORCE YOUR STRIPS (OPTIONAL)

Fold the strips in a  $\frac{1}{2}$  inch on each side, meeting raw edges, pressing wrong sides together.

Strips will now be 1 inch wide. Press on the shape flex  $\frac{1}{4}$  strip on the BACK side, over the raw edges to secure the threads, adding stability.



# PREP YOUR WEAVING BOARD

2

## DRAW THE LINES



With a permanent marker draw 4" grids on your Foam Board. This will help you line up your strips to insure they are straight.

Lay down a 12" x 12" panel of medium weight shape flex, bumpy side up. Once the weave is done on top of this it will be pressed down and the shape flex will secure the weave in place until the quilting is done.



# WEAVING YOUR LAYERS

1

## LAY OUT YOUR BASE LAYER

6 Black strips and 10 colored strips are needed for base layer (Diagram A). Lay out 1 Black strip, 2 Colored strip, 1 Black strip, (note: starting and ending with black).

2

## WEAVE IN 2ND LAYER

Reference the Wefty Star Pattern for this process.

3

## WEAVE IN 3RD LAYER

4

## COMPLETE THE PANEL

Once all the weaving is done and you are satisfied with the results, press the weave to the heat & bond / interface to secure it. Remove all the pins and your new fabric panel. Now it's time to quilt your panel. We recommend a simple echo stitch to the stars.

Trim up the edges leaving a ¼" seam allowance on all sides. Your finished fabric panel should be 16 ½" X 24 ½"

## MAKE PIPINGS

Make piping and sew down on the 16½" ends.



5

## ZIPPER AND END CAPS

### PREPARE ZIPPER.

Sew Lilac Fabric strips on either side of zipper. Sew tabs on either end of the zipper for a finished look. Sew zipper onto one of the 24½" sides, right side together. Sew second side of zipper in.

### INSTALL END CAPS.

Open zipper before installing end caps. Fold circles in half and quarters to MAKE matched up lines. Fold bolster end openings in half and quarters to MAKE matched up lines. Match up the quarter marks of the circle and end caps and pin in place. Sew right sides together. REPEAT on second end cap.

**TURN RIGHT SIDES OUT & INSTALL BOLSTER PILLOW FORM. YOUR DONE!**

